

ENCLOSURE
 FRAME AND COVERS 0.8 mm THICK PREGALVANISED MILD STEEL
 NATURAL FINISH

DEGREE OF PROTECTION
 RESISTOR ENCLOSURE INGRESS (IEC 60529) IP20

TECHNICAL DATA
 MAX. RATED VOLTAGE 1000 V AC OR DC
 RATED POWER 3 kW CONTINUOUS
 RESISTANCE 3 - 330 Ω AT 25°C
 MAX. TEMPERATURE RISE 600°C
 ELEMENT TYPE HP1500
 ELEMENT MATERIAL Fe-Cr-Al
 UNIT WEIGHT 4.5 kg

ALL INSULATOR MATERIAL IS CERAMIC




MOUNTINGS:
 4 OFF 12 x 8 SLOTS

2 x CERAMIC FORMER
 (RESISTOR)


THERMAL TRIP
 OPTIONAL

TERMINAL BLOCK
 MAXIMUM CABLE SIZE 10mm²
 SCREW TERMINAL
 MAX TORQUE 1Nm

ISOMETRIC VIEW
 SHOWN WITHOUT OPTIONAL TERMINAL COVER

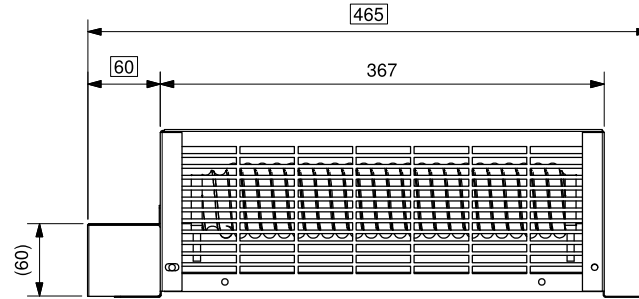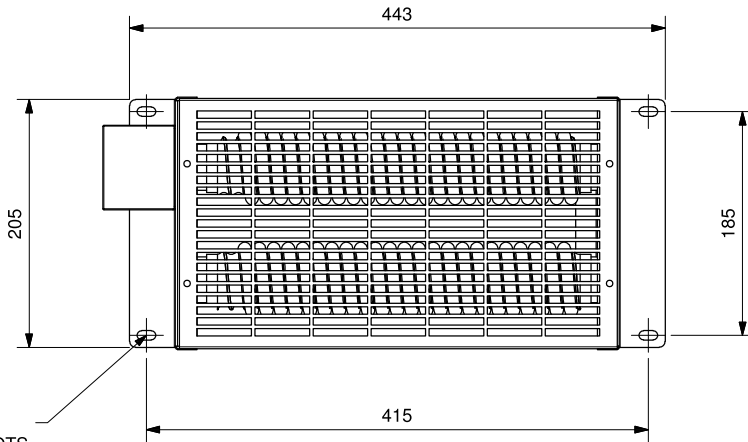

OPTIONAL TERMINAL COVER

F	8626	REDRAWN. DIMS WERE 467, 213, 141, NOW CHANGED TO 465, 209, 139.		SDR	
ISSUE	ECN	DESCRIPTION	DATE	DRAWN	APPROVED
MATERIAL: SEE SPEC			WEIGHT: N/A		
FINISH: SEE SPEC			1st CONTRACT:		
TOLERANCE:- +/- 0.5 mm (UOS) DIMENSIONS IN mm (UOS)			DRAWING TITLE		
CRESSALL			ES2 GENERAL ARRANGEMENT		
Evington Valley Road, Leicester. LE5 5LZ UK.		TEL: (+44)(0)116 273 3633 FAX: (+44)(0)116 273 7911 email: sales@cressall.com www.cressall.com	DRAWING.No.		SHEET
© Cressall Resistors Ltd 2015			103202		ISS
DRAWING STATUS: Released					1 of 1
					F