




1 2 3 4 5 6

A

B

C


D

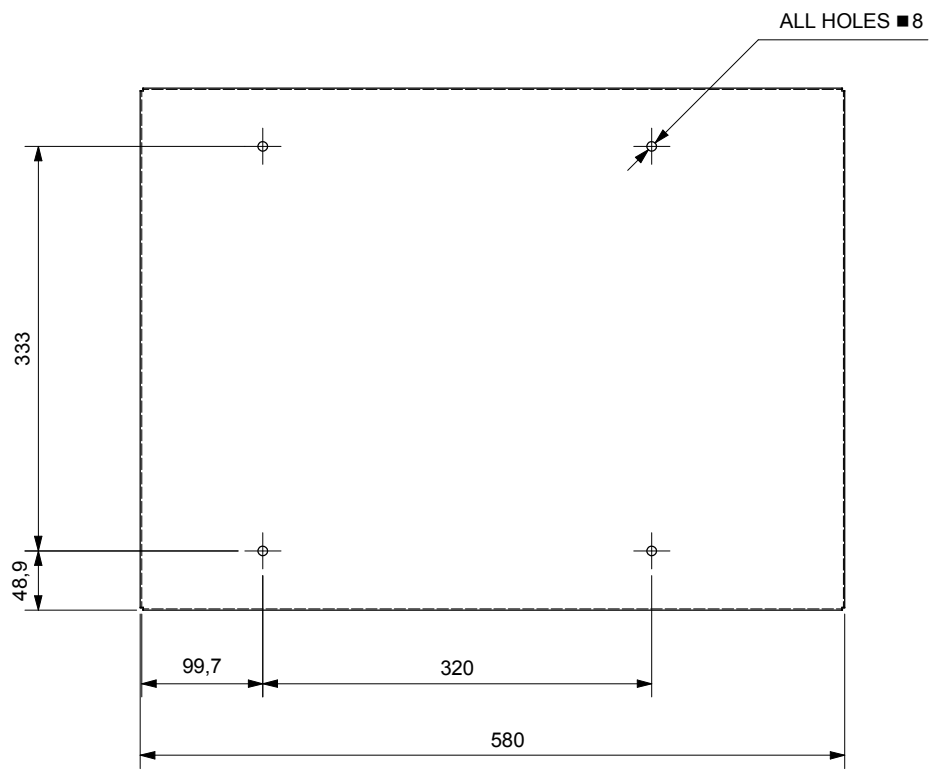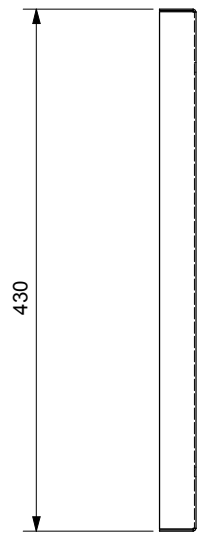

GALVANIZING OF MILD STEEL VARIANT
 GALVANIZE TO EN ISO 1461: 1999
 (55 MICRONS MIN TO 70 MICRONS MEAN)
 ENSURE ALL HOLES ARE FREE OF GALV
 LEAVE CORNERS FREE OF WELD FOR GALV DRAINAGE

MATERIAL	
/304	STAINLESS STEEL GRADE 304 x 1.2 THK
/316	STAINLESS STEEL GRADE 316 x 1.2 THK
/AZ	ALUZINK x 1.2 THK
/PG	PRE GALVANISED x 1.2 THK
/G	MILD STEEL GALVANISED x 1.2 THK

NOTE: DO NOT WELD /AZ OR /PG VARIANT



B	5081	CHANGED HOLE DIMS	27/10/2011	MAG	AK
ISSUE	ECN	DESCRIPTION	DATE	DRAWN	APPROVED
MATERIAL:			WEIGHT: N/A		
FINISH:			1st CONTRACT: CR031240		
TOLERANCE:- +/0.5 mm (UOS)			DRAWING TITLE		
DIMENSIONS IN mm (UOS)			CANOPY		
CRESSALL		TEL: (+44)(0)116 273 3633	DRAWING.No.		
Evington Valley Road, Leicester.LE5 5LZ		FAX: (+44)(0)116 273 7911			
UK.		email: sales@cressall.com	120617		
		www.cressall.com			
		© Cressall Resistors Ltd 2011	SHEET		ISS
DRAWING STATUS: Released		1 of 1		B	

1 2 3 4 5 6