
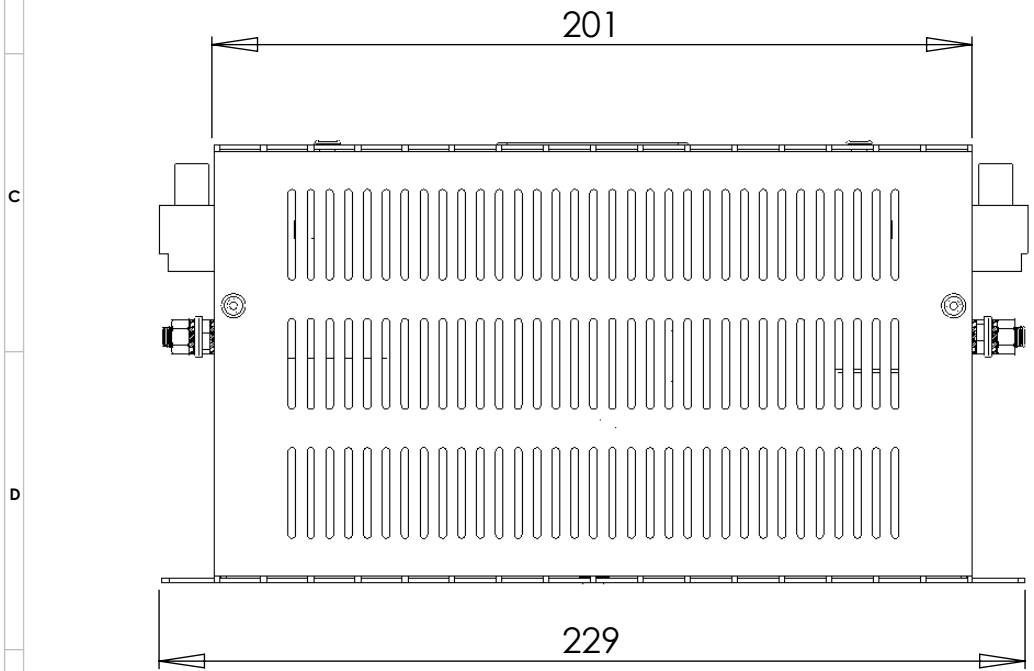
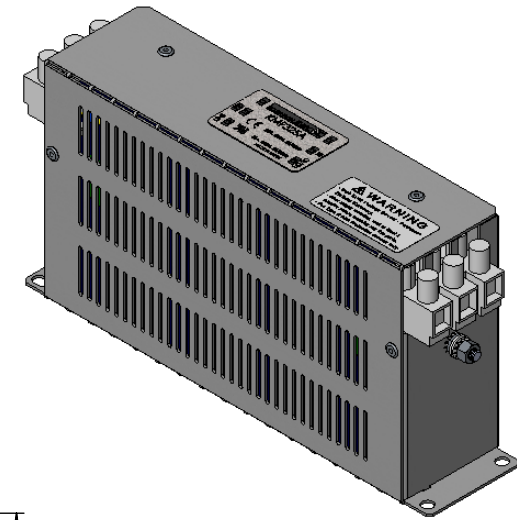


REV.	CNN	CNN DESCRIPTION	Date	Check in
A	-	border change	25/02/2010	Shaun Barron
01	-	border change	18/03/2010	Shaun Barron

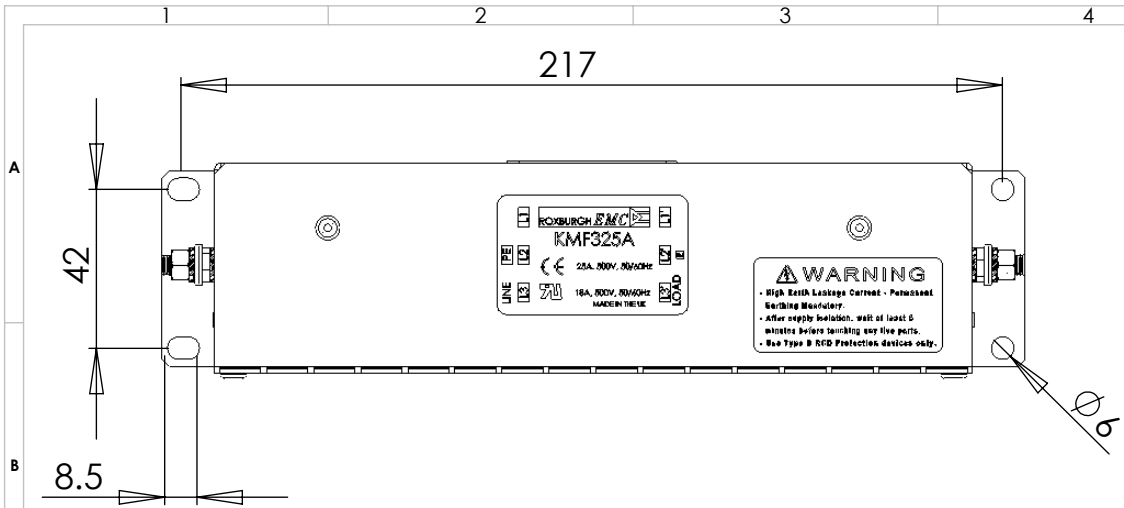

SPECIFICATIONS

VOLTAGE 500Vac
 FREQUENCY 50/60Hz
 CURRENT 25A @ 40°C
 TEMPERATURE -25 TO 100°C
 LEAKAGE CURRENT 67mA @ 500V 50Hz
 HUMIDITY 90% RH (NON-CONDENSING)
 VIBRATION 10-200Hz 1.8G
 ELECTRIC STRENGTH 2250Vac/1min.
 POWER DISSIPATION 11W
 MASS 1.2kg
 TERMINALS 10sqmm TERMINAL BLOCK
 EARTH TERMINALS M5 STUD
 FLANGE MOUNTING 4x M5

RoHS
2002/95/EC
Compliant

Tel No. +44(0)1724 273200 Website www.dem-uk.com

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 ALPHA 3 MANUFACTURING.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
 ALPHA 3 MANUFACTURING IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETRES
 LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm
2 DECIMAL PLACES ±0.125mm
ANGULAR TOLERANCE: ±1°



DEM Manufacturing, Deltron Emcon House
 Hargreaves Way, Sawcliffe Ind. Park,
 Scunthorpe, North Lincolnshire, DN15 8RF, UK

FINISH STANDARD FILTER -
 DEBURR AND BREAK SHARP EDGES
 DRAWN BY S BARRON
 APPROVED BY SW
 THIRD ANGLE PROJECTION
 IF IN DOUBT ASK DO NOT SCALE DRAWING
 MATERIAL -

SCALE 1:2
 SHEET 1 OF 1
 A4

TITLE GENERAL SPECIFICATION
 3 PHASE 25A 500V
 INDUSTRIAL FILTER
 DRAWING NO. KMF325A
 ISSUE 01
 Release