
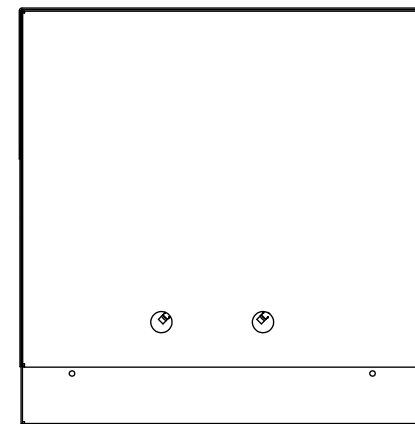
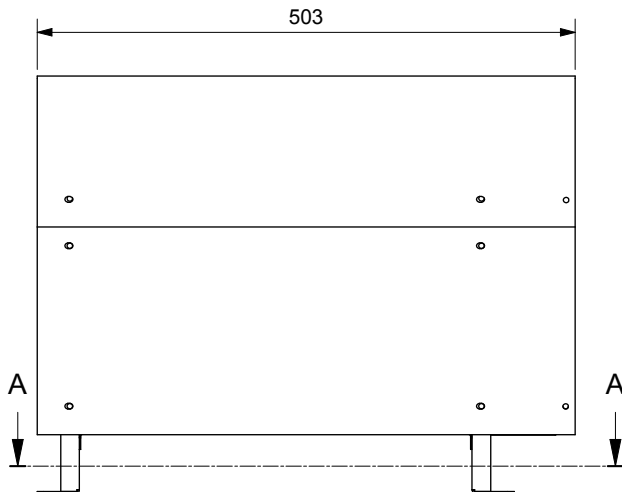


12 x 8 FIXING SLOTS

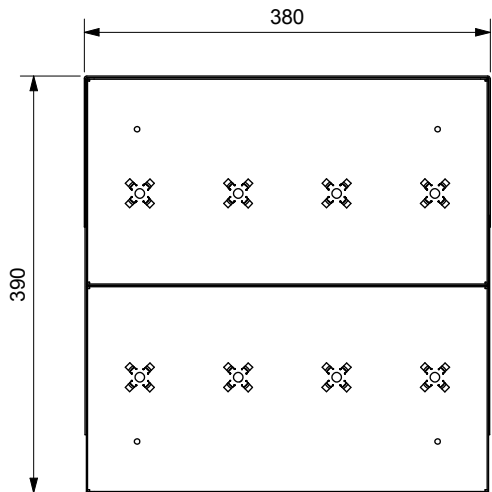


ENCLOSURE
 FRAME AND COVERS 1.2 mm THICK PREGALVANISED MILD STEEL
 NATURAL FINISH

DEGREE OF PROTECTION
 RESISTOR ENCLOSURE INGRESS (IEC 529) IP20

TECHNICAL DATA
 MAX. RATED VOLTAGE 1000 V ac or dc
 RATED CONTINUOUS POWER 9kW
 RESISTANCE 0.75-3728Ω AT 25°C
 MAX. TEMPERATURE RISE 600°C
 ELEMENT TYPE HP1500
 ELEMENT MATERIAL Fe-Cr-Al
 UNIT WEIGHT 9 kg

ALL INSULATOR MATERIAL IS CERAMIC

D	5513	OVERALL DIMENSION CHANGED, 380 WAS 399		KA	
ISSUE	ECN	DESCRIPTION	DATE	DRAWN	APPROVED
MATERIAL: -			WEIGHT: N/A		
FINISH: -			1st CONTRACT:		
TOLERANCE:- +/- 0.5 mm (UOS)		 DIMENSIONS IN mm (UOS)	DRAWING TITLE		
CRESSALL			ES8 GENERAL ARRANGEMENT		
Evington Valley Road, Leicester.LE5 5LZ UK.		TEL: (+44)(0)116 273 3633 FAX: (+44)(0)116 273 7911 email: sales@cressall.com www.cressall.com	DRAWING.No.		SHEET
© Cressall Resistors Ltd 2011			117482		ISS
DRAWING STATUS: Released					1 of 1
					D